



MARINA SHARK

ASSEMBLY INSTRUCTIONS



Thank you for choosing our product to help improve your boating experience. Your new Marina Shark folding bike will give you years of trouble-free performance.

If you have any questions, call:
1-800-270-4262

**PLEASE READ THESE INSTRUCTIONS
CAREFULLY BEFORE USING YOUR NEW BIKE.**

Cut out the registration card and mail immediately!

From:

Place
Stamp
Here




Warranty Registration
21624 Marilla Street
Chatsworth, CA 91311-4123

If you have any questions or problems with your new Marina Shark, please do NOT contact Boater's World. Please call our friendly technical staff for assistance.
1-800-270-4262

Step 5

Unfolding Pedals. Simply pull up on your pedal until it snaps into place. You may easily fold your pedals away for storage by pushing them in slightly towards the bike frame, and then folding up.

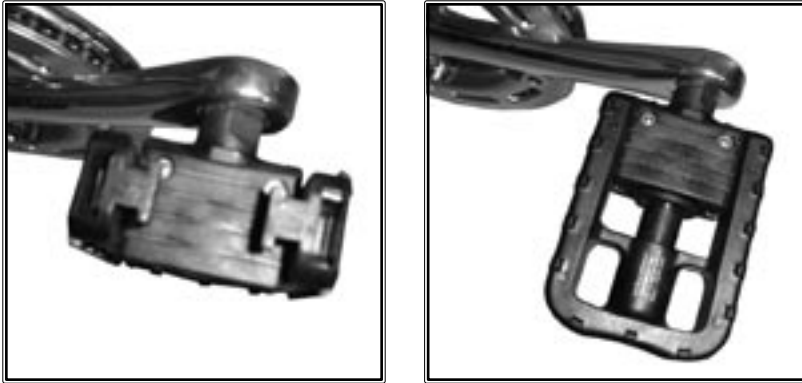


**PLEASE READ YOUR
"BICYCLE OWNER'S MANUAL"
BEFORE OPERATING THIS BICYCLE.**

If you have any questions or problems with your new Port Runner, please do NOT contact Boater's World. Please call our friendly technical staff for assistance.

1-800-270-4262

KNOWING YOUR BIKE

Some Helpful Terms...

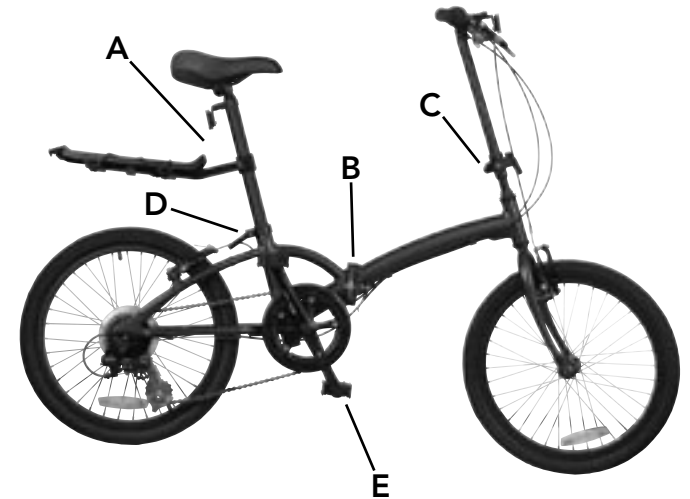

- A Seat Assembly (includes: seat, seat post, luggage rack)
- B Frame Lock
- C Handle Bar Lock
- D Quick Release Seat Lever
- E Folding Pedals


Step 1

Unpacking your bike. Carefully remove all protective wrapping and discard. Set the Seat Assembly aside for a moment. Standing on the bike chain side of the bike, swing the front and rear halves of the bike apart.




Step 2

Secure the quick connect Frame Lock. Be sure that the spring loaded bolt is tight and the fold down lever rests flush against the surface. Fold down the quick connect lever. It should lock firmly in place.

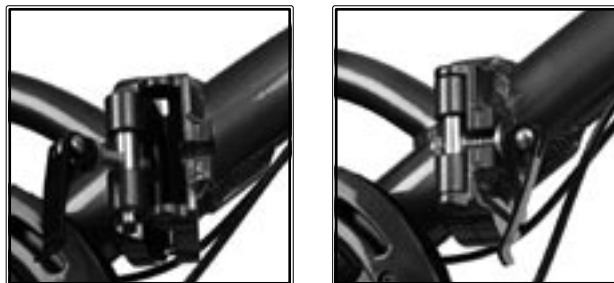

Step 3

Secure the Handle Bar Lock. Swing the handle bar up into position. Align the wedge shaped block into position and tighten down the locking handle by turning it clockwise, until secure.

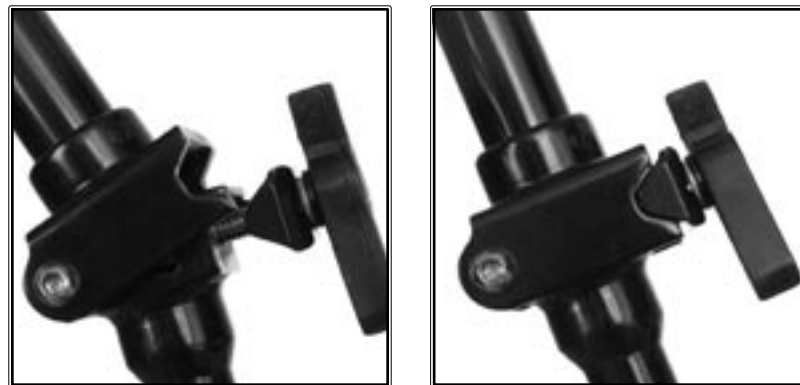

Step 4

Install the Seat Assembly. Install the Seat Assembly post into position to your desired height. Tighten the Quick Release Seat Lever by pushing forward until firm. Caution: If the Seat Assembly can still turn from side to side, or slide up and down, you will need to tighten the adjusting nut on the other side of the Quick Release Seat Lever before securing. Note: 20 lb maximum weight for the Luggage Rack.

