

 **West Marine**[®]
We make boating more fun![™]

ASSEMBLY INSTRUCTIONS

Port Runner II



Thank you for choosing our product to help improve your boating experience. Your new Port Runner II folding bike will give you years of trouble-free performance.

If you have any questions, call:
1-877-818-BIKE (2453)

**PLEASE READ THESE INSTRUCTIONS
CAREFULLY BEFORE USING YOUR NEW BIKE.**

Cut out the registration card and mail immediately!

From:

Place
Stamp
Here

Port Runner II

Warranty Registration
18065 Redondo Circle
Huntington Beach, CA 92648


If you have any questions or problems with your new Port Runner II, please do NOT contact West Marine. Please call our friendly technical staff for assistance.
1-877-818-BIKE (2453)

ADJUSTMENTS

You can easily and quickly adjust the height of the seat and handle bars to fit any rider!

Locate the Quick Release Seat Lever or Quick Release Handle Bar Lever. Lift the lever and flip over. Adjust the seat or handle bars as desired. Flip the lever back over to tighten. Make sure lever is always completely tightened before riding. Caution: If the Seat Assembly or Handle Bar Assembly can still turn from side to side, or slide up and down, you will need to tighten the adjusting nut on the other side of the Quick Release Lever before securing.

Note: Seat Assembly can be removed from the bike while the bike is folded, to save additional space! Simply follow the above directions and slide the Seat Assembly completely out of the frame.




**PLEASE READ YOUR
"BICYCLE OWNER'S MANUAL"
BEFORE OPERATING THIS BICYCLE.**

If you have any questions or problems with your new Port Runner II, please do NOT contact West Marine. Please call our friendly technical staff for assistance.
1-877-818-BIKE (2453)

KNOWING YOUR BIKE

Some Helpful Terms...

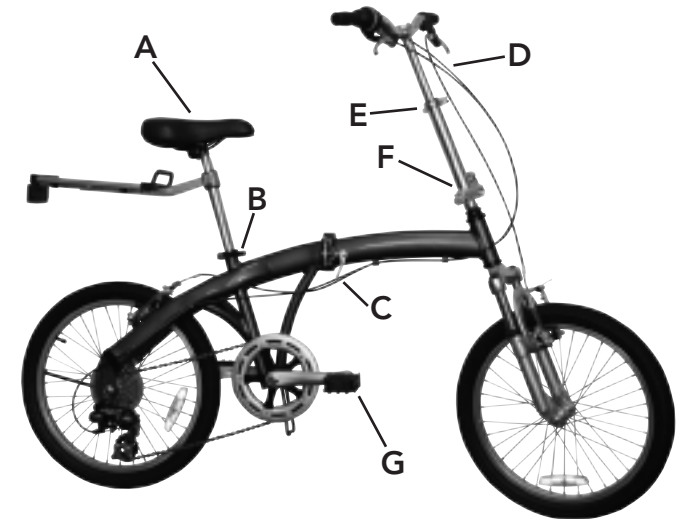

- A Seat Assembly (seat, seat post, rack)
- B Quick Release Seat Lever
- C Frame Lock
- D Handle Bar Assembly (includes: handle bar, handle bar stem, grips, shifter, brake levers)
- E Quick Release Handle Bar Lever
- F Handle Bar Stem Lock
- G Folding Pedals

FOLDING

As Easy As 1-2-3

1- Unlock and fold the pedals

Simply push the pedal in slightly towards the bike frame and lift up on the end of the pedal.



2- Unlock and fold the handle bars

Pull up on the Handle Bar Stem Lock quick connect lever to release it. Rotate the quick connect lever and spring loaded bolt down to the side. While pressing the safety locking button in, swing the Handle Bar Assembly down to the side of the frame.



3- Unlock and fold the frame

Standing on the chain side of the bike, pull up on the Frame Lock quick connect lever to release it. Rotate the quick connect lever and spring loaded bolt away from the frame. Slightly lift up on the quick connect lever and spring loaded bolt to allow the safety locking pin to disengage and the two halves of the frame to separate. Swing the front and rear halves of the bike together.



Optional- Lower the Seat Assembly

To save additional space, you can lower the Seat Assembly all the way down to the frame. Pull up the Quick Release Seat Lever and flip over. Allow the Seat Assembly to slide all the way down to the frame.



UNFOLDING

As Easy As 3-2-1

3- Unfold and lock the frame

Standing on the chain side of the bike, swing the front and rear halves of the bike into position. Slightly lift up on the quick connect lever and spring loaded bolt to allow the safety locking pin to engage and the two halves of the frame to align. Release the assembly, allowing the locking pin to drop into position. Rotate the quick connect lever and spring loaded bolt into position and fold down the quick connect lever. Be sure that the spring loaded bolt is tight and the fold-down lever rests flush against the surface. It should lock firmly in place.



2- Unfold and lock the handle bars

While pressing the safety locking button in, swing the Handle Bar Assembly up into position. Release the button, allowing the two halves of the stem to align. Rotate the quick connect lever and spring loaded bolt up into position and fold down the quick connect lever. Be sure that the spring loaded bolt is tight and the fold-down lever rests flush against the surface. It should lock firmly in place.



1- Unfold and lock the pedals

Simply lift up on the pedal until it snaps into place.



See "Adjustments" on page 6 for additional tips.