



SHURflo[®] Marine Grade Faucets

INSTALLATION INSTRUCTIONS


Your new SHURflo Marine Grade Faucet will give you years of trouble-free performance. Thank you for choosing SHURflo Marine Grade Faucets. Please read these instructions carefully before installing your new faucet. If you have any additional questions about the installation of this faucet, please feel free to contact one of our friendly customer service representatives at 1-800-854-3218.




- (1) Turn off the water supply to your existing faucet (this procedure will vary depending on the specific plumbing system installed on your boat). Cover the sink drain to prevent any small parts or debris from falling in. Remove your existing faucet, taking care not to damage your existing water lines. Clean sink area in preparation for new faucet.




- (2) Remove the lock nut (with screws), metal washer and rubber washer from both valves. Wrap the male fittings on the connector hoses with Teflon (Plumber's) tape and screw them into the bottom of the valves. Use a wrench or pliers on the hex nut molded into the base of the male fitting. Do NOT attempt to tighten by turning the hose itself. Place valves in sink holes (both valves are identical, either one can be used for the left or the right side). Position the escutcheon so that it aligns with the top thread of the valve body. From under the sink, slide the rubber then metal washers onto the valves. Screw lock nuts onto the valves (with the two screws pointing up) and hand tighten. Position valve on the sink and tighten the lock nut screws with a screwdriver. **CAUTION: DO NOT OVER TIGHTEN SCREWS.**

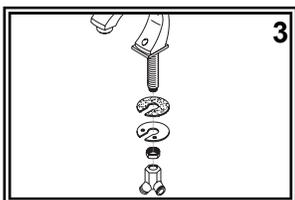

- (3) Remove the Y connector, spout nut, metal spout washer and rubber spout washer from the spout assembly. Line up the spout base and gasket with the bottom of the spout and set it in the center hole of the sink. Lock the rubber and metal washers together and from under the sink, slide them onto the shank and up against the bottom of the sink. Position spout and secure with spout nut. Wrap both male fittings on the Y connector with Teflon (Plumber's) tape and attach it to the end of the spout shank. Connect female fittings on the connector hoses to the Y connector.

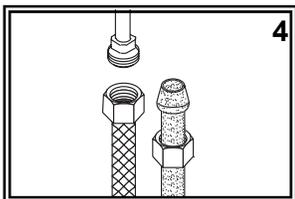


- (4) Connect water supply lines (not provided) to the valve inlet tubes. Wrap the brass fittings on the inlet tubes with Teflon (Plumber's) tape. Follow the appropriate steps depending on your water supply lines. If you have pre-assembled water supply hoses with threaded connectors, simply screw on supply hose. If you have plastic water lines with formed ends, water lines will seat partially up into the brass fittings. Connect by tightening the coupling nuts. We do NOT suggest using sweat fittings as they are prone to blow-outs.

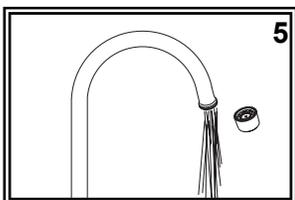

- (5) After installation is complete, remove the aerator. Be careful not to scratch the finish. Turn the water supply back on and allow both hot and cold water to run for at least one full minute. While water is running, check all connections for leaks. Replace aerator. Connections may need re-tightening.

Parts

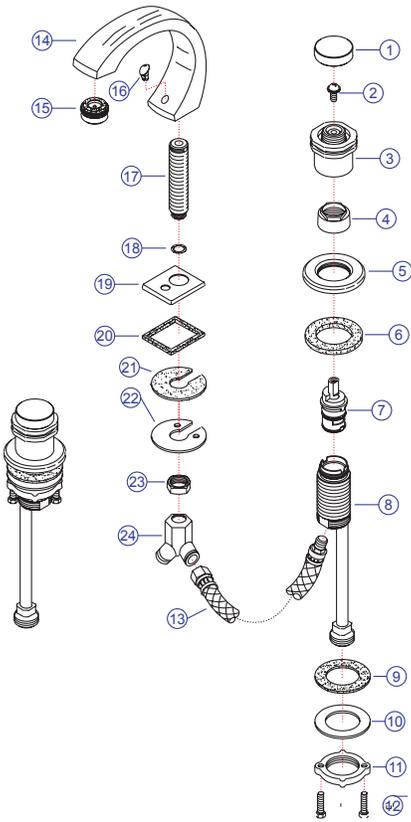

- 1) Handle Cap
- 2) Handle Screw
- 3) Pisces Handle
- 4) Retainer Nut
- 5) Escutcheon
- 6) Gasket
- 7) Ceramic Disc Cartridge
- 8) Valve
- 9) Rubber Washer
- 10) Metal Washer
- 11) Lock Nut
- 12) Lock Nut Screws
- 13) Connector Hose
- 14) Spout
- 15) Aerator
- 16) Lift-Rod Hole Plug
- 17) Spout Shank
- 18) O-Ring
- 19) Spout Base
- 20) Spout Base Gasket
- 21) Rubber Spout Washer
- 22) Metal Spout Washer
- 23) Spout Nut
- 24) Y Connector



The matching optional Pop-Up Drain kit with lift-rod is available through your retailer. Ask for 131-0419-CG



PROPER FINISH CARE:

Your new faucet is protected by a clear-coat. To clean it, you only need to wipe it with a damp, soft cloth. NEVER use any abrasive cleaners, steel wool, or chemicals, as they will harm the finish and void your warranty. If the faucet will be installed in a salt-air environment (boat exterior), regular cleaning with gentle soap and carnauba wax will prolong the life of the finish.

LIMITED WARRANTY

SHURflo Marine Grade Faucets & Accessories are guaranteed to be free from material and workmanship defects under normal use and service for a period of five (5) years from the date of purchase. This limited warranty will not apply to faucets or accessories that were improperly installed, misapplied, or incompatible with components not manufactured by SHURflo. Faucet failure due to foreign debris is not covered under the terms of this limited warranty. SHURflo will not warrant any faucet that is physically damaged or altered outside the SHURflo factory. Warranty claims may be resolved by a SHURflo service center. All returns are to be shipped with charges pre-paid. Package all returns carefully. SHURflo will not be responsible for freight damage incurred during shipping to a service center. SHURflo's obligation under this warranty policy is limited to the repair or replacement of the faucets & accessories. Faucets or accessories found not defective (under the terms of this limited warranty) are subject to charges to be paid by the returnee for the testing and packaging of "tested good" units. Warranty returns will be shipped on a freight allowed basis. SHURflo reserves the right to choose the method of transportation. SHURflo is not responsible nor will it reimburse for labor necessary to remove and reinstall a faucet or accessory if found defective. This warranty is only a representation of the complete Marine Products Limited Warranty outlined by Service Bulletin #1050.

**SHURflo reserves the right to update specifications, prices, or make substitutions.*



SHURflo*
5900-A Katella Ave.
Cypress, CA 90630
(562) 795-5200 (800) 854-3218
FAX (562) 795-7564
Shipping: 5900-C Katella Ave.
Cypress, CA 90630

SHURflo East
52748 Park Six Court
Elkhart, IN 46514-5427
(574) 262-0478 (800) 762-8094
FAX (574) 264-2169
<http://www.shurflo.com>

SHURflo Ltd.*
Unit 5 Sterling Park
Gatwick Road, Crawley
West Sussex, RH10 2QT
United Kingdom
+44 1293 424000
FAX +44 1293 421880

