SHURID Marine Grade Faucets

INSTALLATION INSTRUCTIONS


OEM Version

Attention Manufacturers: Please include this Installation Instruction sheet with your Owner's Documentation.




136-0203-CW


Trinidad 2 Handle (Hot / Cold) Transom Shower Chrome / White




(1) Check desired position to make sure there is enough room for the hose to gather under the deck or inside the wall without getting caught on anything. Cut 4 7/8" by 7 7/8" rectangle in the desired location. Take extra care to ensure straight, clean, accurate cutting.




- (2) Set the transom box and lid into the hole to ensure proper fit and remove.
- (3) Connect the 72" hose to the center port on the valve connector bar. Make sure rubber washer is in place in the female hose fitting.




(4) Connect hot and cold water supplies to the 1/2" NPT-Male inlets on the bottom of the valve. It may be necessary to use 90 degree elbow fittings, not provided. Check to ensure that the hot supply is connected to the handle with the red cap and the cold supply is connected to the handle with the blue cap.



(5) Carefully place the transom box and lid with all the connections securely made, back into the hole. Secure transom box and lid using the provided six (6) screws.



(6) This sprayer has two functions: intermittent and continuous. For intermittent spray, simply press down on the trigger. For continuous spray, lift up on the trigger until it locks. To release, simply press the trigger back down.

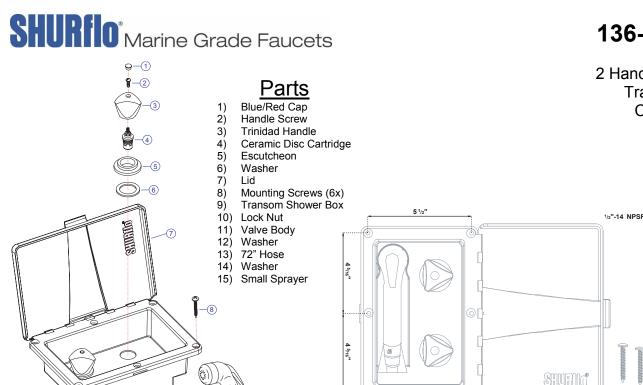

<u>@</u>-14

ė –(12

136-0203-CW

Trinidad 2 Handle (Hot / Cold) Transom Shower Chrome / White

PROPER FINISH CARE:

7 7/8"

Your new faucet is protected by a clear-coat. To clean it, you only need to wipe it with a damp, soft cloth. NEVER use any abrasive cleaners, steel wool, or chemicals, as they will harm the finish and void your warranty. If the faucet will be installed in a salt-air environment (boat exterior), regular cleaning with gentle soap and carnauba wax will prolong the life of the finish.

LIMITED WARRANTY

SHURflo Marine Grade Faucets & Accessories are guaranteed to be free from material and workmanship defects under normal use and service for a period of three (3) years from the date of manufactured vessel for all indoor applications and two (2) years from the date of manufactured vessel for all outdoor applications. This limited warranty will not apply to faucets or accessories that were improperly installed, misapplied, or incompatible with components not manufactured by SHURflo. Faucet failure due to foreign debris is not covered under the terms of this limited warranty. SHURflo will not warrant any faucet that is physically damaged, or altered outside the SHURflo factory. Warranty claims may be resolved by a SHURflo service center. All returns are to be shipped with charges pre-paid. Package all returns carefully. SHURflo will not be responsible for freight damage incurred during shipping to a service center. SHURflo's obligation under this warranty policy is limited to the repair or replacement of the faucets & accessories. Faucets or accessories found not defective (under the terms of this limited warranty) are subject to charges to be paid by the returnee for the testing and packaging of "tested good" units. Warranty returns will be shipped on a freight allowed basis. SHURflo reserves the right to choose the method of transportation. SHURflo is not responsible nor will it reimburse for labor necessary to remove and reinstall a faucet or accessory, if found defective. This warranty is only a representation of the complete Marine Products Limited Warranty outlined by Service Bulletin #1050.

★SHURflo reserves the right to update specifications, prices, or make substitutions.



SHURflo*



(10)

5900-A Katella Ave. Cypress, CA 90630 (562) 795-5200 (800) 854-3218 FAX (562) 795-7564 **Shipping**: 5900-C Katella Ave. Cypress, CA 90630 SHURflo East 52748 Park Six Court Elkhart, IN 46514-5427 (574) 262-0478 (800) 762-8094 FAX (574) 264-2169

http://www.shurflo.com

SHURflo Ltd.*

41/8"

1/2"-14 NPSN

4 710

Unit 5 Sterling Park Gatwick Road, Crawley West Sussex, RH10 2QT United Kingdom +44 1293 424000 FAX +44 1293 421880

136-0203-CW Rev. 12/04